


Rewmar RP

Rapid Primer and DPM

Product Data Sheet

Rewmar RP – Rapid Primer

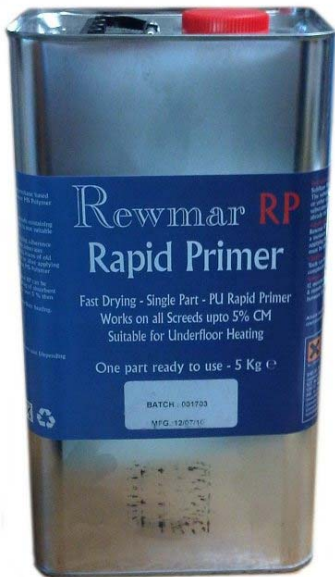

Product Description

Rewmar RP is a fast drying, one part polyurethane based primer. It is designed for use with all Rewmar MS Polymer products.

Application

Rewmar RP can be applied on concrete screeds containing up to 5% Concrete Moisture. This product is not suitable for use with bitumen substrates.

1 Coat: Rewmar RP can be used as fast drying adherence primer on porous / non-porous or smooth substrates (ceramic tiles, adherent and cohesive paints, traces of old glues, etc.). It can be applied either before or after applying a screed/latex but before applying Rewmar MS Polymer adhesive.

2 -3 Coats: Applied in cross layers, Rewmar RP can be used as a moisture barrier for waterproofing of absorbent surfaces up to 98%RH (See moisture ratings below). Note: if the Concrete Moisture is over 75% RH and a liquid batten installation is performed then Rewmar MB must be used.

This product is suitable for use with Underfloor Heating.

Coverage

One 5Kg tub will cover:

<i>1 Coat:</i> 20m ² (250 grams per m ²)	up to 75% RH
<i>2 Coats:</i> 15m ² (350 grams per m ²)	up to 85% RH
<i>3 Coats:</i> 11m ² (450 grams per m ²)	up to 98% RH

Drying Time

Rewmar RP will dry in 45 – 60 minutes per coat (depending on the site conditions).

Instructions For Use

Subfloor Preparation:

The substrates must be sound, free of splits, dust, grease or other contaminants that could affect adhesion. For substrates that are non-porous or smooth it is necessary to abrade the surface prior to application of Rewmar RP.

Application:

Rewmar RP must be applied with a roller. When using as a moisture barrier the first coat must be fully dry before applying the second coat. Rewmar MS Polymer adhesive must be applied within 48 hours of the final coat drying.

Cleaning:

Tools can be cleaned with acetone before primer has completely cured. After curing, abrasion is necessary.

Storage and Shelf Life

12 months sealed original packaging between 5 and 25°C

6 months when opened (kept in the original packaging between 5 and 25°C)

Safety

Harmful. Always read the MSDS sheet before use. This available at www.rewmar.co.uk