

Always Use a professional grade applicator gun with a ratio of 18:1



flexyfix

Example Applications

Coverage: With a single 5mm bead the coverage will be approximately 14 linear metres.


Suitable for internal and external applications.

High grab and rapid cure




Stair Nosings

Traffic ready, without screws, after 1 hour

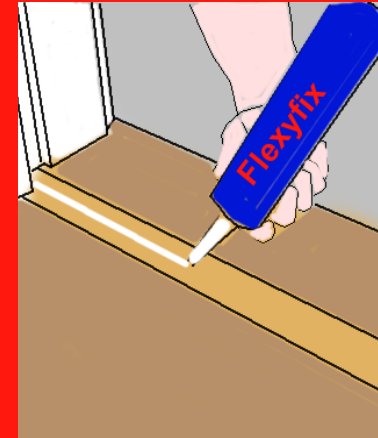

Door Thresholds

Fast and easy. Internal or external. Metal, Plastic or Wood

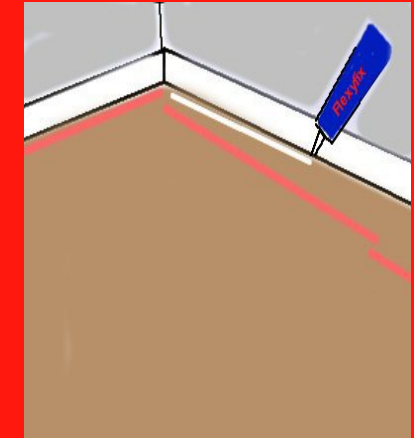

Gripperods


Ready to go in 30 minutes



Any spills or excess adhesive should be removed using


Rewmar

Hand & Tool wipes

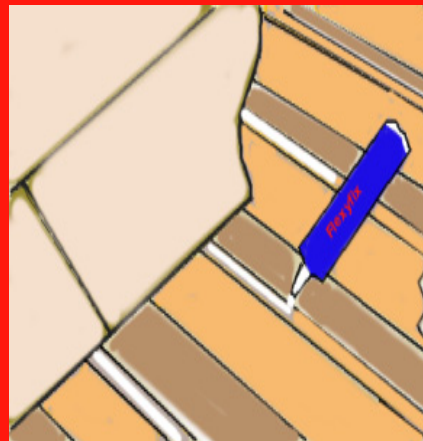


Floor boards, Chipboard onto joists

No nails No squeaks

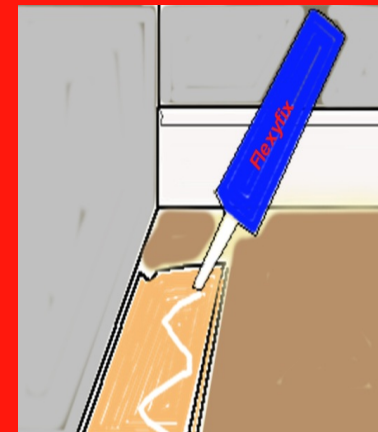

Skirting boards, Dado Rails, Architraves

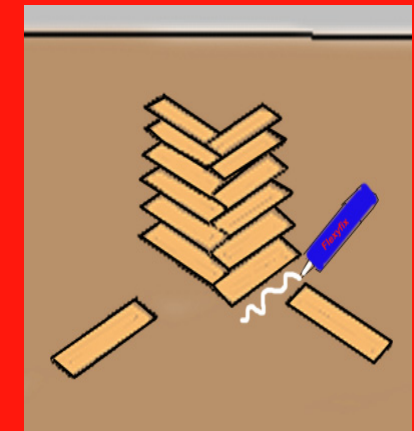

Wood flooring starter rows, repairs and board replacement